

**CONTRACTOR HOT MIX ASPHALT DESIGN DATA**

CEM-3512 (NEW 3/2008)

**ADA Notice**

For individuals with sensory disabilities, this document is available in alternate formats. For information call (916) 654-6410 or TDD (916) 654-3880 or write Records and Forms Management, 1120 N Street, MS-89, Sacramento, CA 95814.

The information provided in this form must be in accordance with Section 39, "Hot Mix Asphalt," of the *Standard Specifications*, and the California Test Method indicated. For information concerning this form, contact the METS Office of Flexible Pavement Materials at (916) 227-7322.

HOT MIX ASPHALT PRODUCER NAME, ADDRESS, AND PHONE NUMBER Dutra Materials - San Rafael 1000 Point San Pedro Rd. San Rafael, CA 94901 (415) 459-7740	HMA TYPE 1/2" HMA Type A or B	DATE March 1, 2021
	PRODUCER MIX IDENTIFICATION NUMBER L210072	

NAME OF QUALIFIED LABORATORY PREPARING THE MIX DESIGN **Pavement Engineering, Inc., Redding, CA**


**AGGREGATE GRADATION**

Bin	4	3	2	1		Reclaimed Asphalt Pavement	Lime	Combined Gradation (JMF TV)
Material Size	1/2"	3/8"	Dust	Sand			—	—
Bin %	15	19	57	9		(JMF TV)		100
Sieve Size	% Passing							
2"	100	100	100	100				100
1 1/2"	100	100	100	100				100
1"	100	100	100	100				100
3/4"	100	100	100	100				100
1/2"	86	100	100	100				98
3/8"	27	92	100	100				88
No. 4	4	9	81	100				57
No. 8	3	4	48	100				38
No. 16	3	1	29	99				26
No. 30	2	1	21	86				20
No. 50	2	1	16	45				14
No. 100	1	1	12	3.0				7.5
No. 200	0.7	0.4	8.9	2.8				5.5

AGGREGATE SOURCES, CALIFORNIA MINE, AND SMARA IDENTIFICATION NUMBERS FOR EACH BIN

SMARA #: 91-21-0008

### FHWA 0.45 Power Gradation Chart

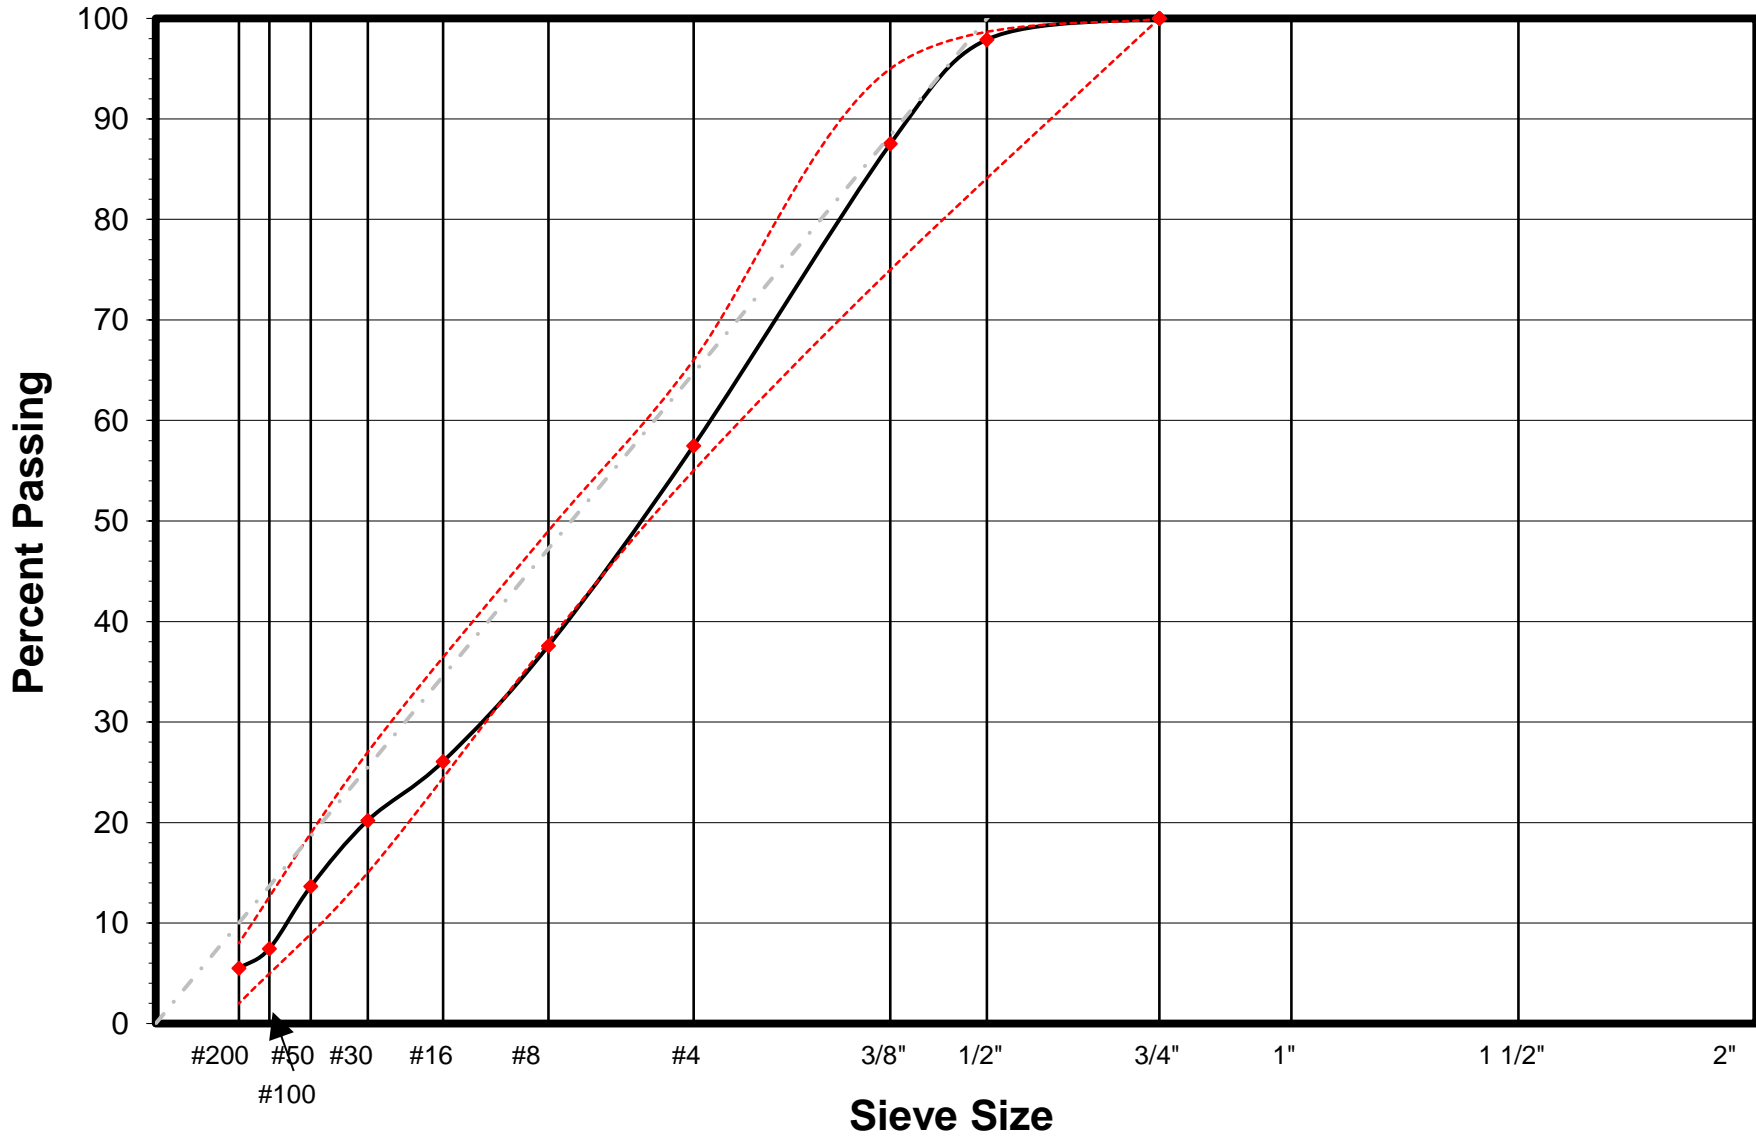

**CONTRACTOR HOT MIX ASPHALT DESIGN DATA (Continued)**

CEM-3512 (NEW 3/2008)

HMA TYPE	PRODUCER NAME	PRODUCER MIX IDENTIFICATION NUMBER	DATE
1/2" HMA Type A or B	Dutra Materials - San Rafael	L210072	March 1, 2021

**AGGREGATE QUALITY \***

Quality Characteristic/Property	Test Method	Test Result			
Crushed particles, coarse aggregate One fractured face (%)	CT 205	100%			
Crushed particles, coarse aggregate Two fractured faces (%)	CT 205	100%			
Crushed particles, fine aggregate (Passing No. 4 sieve and retained on No. 8 sieve) One fractured face (%)	CT 205	100%			
Los Angeles Rattler, Loss at 100 Rev. (%)	CT 211	3.8%			
Los Angeles Rattler, Loss at 500 Rev. (%)	CT 211	17.9%			
Sand equivalent	CT 217	62	62	63	Average: 62
Fine aggregate angularity (%)	AASHTO T 304 (Method A)	45.0			
Flat and elongated particles (% by mass at 3:1)	ASTM D 4791	---			
Flat and elongated particles (% by mass at 5:1)	ASTM D 4791	1%			
Plasticity Index	CT 204	NP			
Sodium sulfate soundness	CT 214	---			
Cleanness Value	CT 227				
Fine aggregate Durability Index	CT 229				
Coarse aggregate Durability Index	CT 229				
K <sub>c</sub> factor (Not mandatory until further notice)	CT 303	---			
K <sub>f</sub> factor (Not mandatory until further notice)	CT 303	---			
Bulk specific gravity (oven dry) of coarse aggregate	CT 206	2.625			
Absorption of coarse aggregate	CT 206	1.3%			
Bulk specific gravity (SSD) of fine aggregate	CT 207	2.637			
Bulk specific gravity (oven dry) of fine aggregate	LP-2	2.600			
Absorption of fine aggregate	CT 207	1.4%			
Apparent specific gravity of supplemental fines	CT 208/LP-2				
Bulk specific gravity of the aggregate blend	LP-2	2.610			

\* Aggregate must comply with the quality specifications before it is treated with lime.

### CONTRACTOR HOT MIX ASPHALT DESIGN DATA (Continued)

CEM-3512 (NEW 3/2008)

Reclaimed Asphalt Pavement (RAP) Aggregate Gradation, Asphalt Binder Content, and Theoretical Maximum Specific Gravity										
HMA TYPE		PRODUCER NAME			PRODUCER MIX IDENTIFICATION NUMBER		DATE		RAP SOURCE	
1/2" HMA Type A or B		Dutra Materials - San Rafael			L210072		March 1, 2021			
	ASTM D 2172 (Method B), CT 202, and CT 309 <sup>1</sup>				CT 382 and CT 202 <sup>2</sup>				Aggregate Gradation Correlation Factor <sup>3</sup>	
	Sample 1	Sample 2	Sample 3	Average <sup>4</sup>	Sample 1	Sample 2	Sample 3	Average		
% Passing	2"									
	1½"									
	1"									
	¾"									
	½"									
	⅜"									
	No. 4									
	No. 8									
	No. 16									
	No. 30									
	No. 50									
	No. 100									
No. 200										
Asphalt Binder Content						<i>Report Only</i>	<i>Report Only</i>	<i>Report Only</i>	<i>Report Only</i>	----
Maximum Specific Gravity						----	----	----	----	----

Note:

<sup>1</sup> A minimum of three samples are required. Determine the asphalt binder content of each RAP sample under ASTM D 2172, Method B. Perform a sieve analysis on each sample of recovered aggregate under CT 202, Appendix A. Determine the theoretical maximum specific gravity (Rice) of each RAP sample under CT 309, Section J.

<sup>2</sup> A minimum of 3 samples are required. Burn asphalt from each RAP sample in accordance with CT 382. Calculate and report asphalt binder content for information only. Perform a sieve analysis on each sample of recovered aggregate in accordance with CT 202, Appendix A for each ignition oven to be used for testing during production.

<sup>3</sup> The correlation factor for each sieve is determined by taking the average gradation of the ASTM D 2172 samples minus the average gradation of the CT 382 samples.

<sup>4</sup> Average aggregate gradation and asphalt binder content (ASTM D 2172 test results) used to calculate mix design batch weights.

**CONTRACTOR HOT MIX ASPHALT DESIGN DATA (Continued)**  
 CEM-3512 (NEW 3/2008)

HMA TYPE	PRODUCER NAME	PRODUCER MIX IDENTIFICATION NUMBER	DATE
1/2" HMA Type A or B	Dutra Materials - San Rafael	L210072	March 1, 2021

**ASPHALT BINDER<sup>1,2</sup>**

 Asphalt binder supplier: [Asphalt Binder: Valero \(Benicia\)](#)

 Asphalt binder grade: [PG 64-16](#)

 Supplier recommended mixing temperature: [299 - 309 °F](#)

Quality Characteristic	Test Method	Test Result
Specific gravity	AASHTO T 228	<a href="#">1.027</a>
Dynamic Shear (RTFO residue), Test Temp. at 10 rad/s, 60°C	AASHTO T 315 <sup>3</sup>	<a href="#">4.29</a>

Note:

<sup>1</sup> Including base asphalt in asphalt rubber binder.

<sup>2</sup> Asphalt binder treated with liquid antistrip must comply with Section 92, "Asphalts," of the *Standard Specifications* for the grade specified.

<sup>3</sup> For use in CT 303.

**ANTISTRIP ADDITIVES**

Antistrip type:

Antistrip source:

 Antistrip percentage (JMF TV): <sup>1,2</sup>

Method of antistrip addition:

Quality Characteristics	Test Method	Test Result
Liquid antistrip (LAS) total amine value (min.)	ASTM D 2074	

Note:

<sup>1</sup> Liquid Antistrip must be between 0.5 and 1.0 percent by weight of asphalt binder.

<sup>2</sup> Combined lime ratio must be between 0.8 and 1.5 by weight of dry aggregate (may be reduced to 0.5 to 1.0 for OGFC).

**CONTRACTOR HOT MIX ASPHALT DESIGN DATA (Continued)**

CEM-3512 (NEW 3/2008)

HMA TYPE	PRODUCER NAME	PRODUCER MIX IDENTIFICATION NUMBER	DATE
1/2" HMA Type A or B	Dutra Materials - San Rafael	L210072	March 1, 2021

**Asphalt Rubber Binder****ASPHALT MODIFIER**

Asphalt modifier supplier

Asphalt modifier percentage (2.0% - 6.0% by weight of asphalt binder)

Base asphalt and asphalt modifier percentage (78.0% - 82.0% by weight of asphalt rubber binder)

Quality Characteristics	Test Method	Test Result	Specification Limit
Viscosity, m <sup>2</sup> /s (x 10-6) at 100°C	ASTM D445		19 to 36 (± 3)
Flash Point, CL.O.C., °C (min.)	ASTM D92		207
Asphaltenes, % by mass (max.)	ASTM D2007		0.1
Aromatics, % by mass (min.)	ASTM D2007		55

**CRUMB RUBBER MODIFIER**

Scrap tire CRM supplier

High natural CRM supplier

Scrap tire CRM percentage (73.0% - 77.0% by total weight of CRM)

High natural CRM percentage (23.0% - 27.0% by total weight of CRM)

Combined scrap tire and high natural CRM percentage (18.0% - 22.0% by weight of binder)

Quality Characteristic	Test Method	Test Result	Specification Limits
Scrap tire CRM gradation (% passing No. 8 sieve)	LP-10		100
High natural CRM gradation (% passing No. 10 sieve)	LP-10		100
Wire in CRM (% max.)	LP-10		0.01
Fabric in CRM (% max.)	LP-10		0.05
CRM particle length (inch max.)	----		3/16
CRM specific gravity	CT 208		1.1 - 1.2
Natural rubber content in high natural CRM (%)	ASTM D 297		40.0 - 48.0

**ASPHALT RUBBER BINDER DESIGN AND PROFILE**

Quality Characteristic	Test Method	Minutes of Reaction <sup>1</sup>						Specification Limits	
		45	60	90	120	240	360		1440
Cone penetration @ 77 °F, (0.10-mm)	ASTM D 217		---	---	---		---		25 - 70
Resilience @ 77 °F, % rebound (min.)	ASTM D 5329		---	---	---		---		18
Field softening point, °F	ASTM D 36		---	---	---		---		125 - 165
Viscosity, centipoises	LP-11								1,500 - 4,000

Reaction temperature from 1320 minutes to 1440 minutes:

<sup>1</sup> Six hours (360) minutes after CRM addition, reduce the oven temperature to 275 degrees F for a period of 16 hours. After the 16-hour cooldown (1320 minutes after CRM addition), reheat the binder to the reaction temperature expected during production (350 °F) for sampling and testing at 24 hours (1440 minutes).

**CONTRACTOR HOT MIX ASPHALT DESIGN DATA (Continued)**

CEM-3512 (NEW 3/2008)

HMA TYPE	PRODUCER NAME	PRODUCER MIX IDENTIFICATION NUMBER	DATE
1/2" HMA Type A or B	Dutra Materials - San Rafael	L210072	March 1, 2021

**APPROXIMATE BITUMEN RATIO (ABR)<sup>1</sup>**

Property	Test Method	Test Results
Surface area of aggregate blend (ft <sup>2</sup> /lb)	CT 303	26.8
Surface constant of aggregate blend, K <sub>m</sub>	CT 303	
ABR	CT 303	
Corrected ABR <sup>2</sup>	CT 303	

Note:

<sup>1</sup> Not mandatory until further notice.<sup>2</sup> Determine ABR using LP-9 if reclaimed asphalt pavement (RAP) is used.**HOT MIX ASPHALT DESIGN DATA**

Quality Characteristic	Test Method	ABR (Corrected) - 0.5%	ABR (Corrected)
Asphalt binder content DWA (%)	CT 367	5.3	5.8
Briquette height (inches)	CT 304	2.50	2.49
Briquette bulk specific gravity	CT 308 (Method A)	2.319	2.340
Maximum specific gravity	CT 309	2.462	2.445
Air voids content (%)	CT 308(A) and CT 309	5.8	4.3
Voids in mineral aggregate (%)	LP-2	15.6	15.3
Effective specific gravity of RAP aggregate	LP-2	----	----
Voids filled with asphalt (%)	LP-3	62.9	71.9
Dust proportion	LP-4	1.2	1.1
Effective specific gravity of aggregate	LP-1/LP-4	2.659	2.658
Stabilometer value	CT 366	43	41
Modified stabilometer value	CT 366	----	----

Quality Characteristic	Test Method	ABR (Corrected) + 0.5%	ABR (Corrected) + 1.0%
Asphalt binder content DWA (%)	CT 367	6.3	6.8
Briquette height (inches)	CT 304	2.49	2.49
Briquette bulk specific gravity	CT 308 (Method A)	2.359	2.378
Maximum specific gravity	CT 309	2.427	2.410
Air voids content (%)	CT 308(A) and CT 309	2.8	1.3
Voids in mineral aggregate (%)	LP-2	15.0	14.7
Effective specific gravity of RAP aggregate	LP-2	----	----
Voids filled with asphalt (%)	LP-3	81.3	91.0
Dust proportion	LP-4	1.0	0.9
Effective specific gravity of aggregate	LP-1/LP-4	2.655	2.653
Stabilometer value	CT 366	39	38
Modified stabilometer value	CT 366	----	----

**CONTRACTOR HOT MIX ASPHALT DESIGN DATA (Continued)**

CEM-3512 (NEW 3/2008)

HMA TYPE	PRODUCER NAME	PRODUCER MIX IDENTIFICATION NUMBER	DATE
1/2" HMA Type A or B	Dutra Materials - San Rafael	L210072	March 1, 2021

**HOT MIX ASPHALT DESIGN DATA AT JOB MIX FORMULA<sup>1</sup>**

Quality Characteristic	Test Method	Test Result			
Asphalt binder content DWA% (TWM)	CT 367	5.90 (5.60)			
Briquette bulk specific gravity	CT 308 (Method A)	2.344	2.343	2.341	Average 2.343
Maximum specific gravity	CT 309	2.441			
Air voids content (%)	CT 308 and CT 309	4.0	4.0	4.1	Average 4.0
Voids in mineral aggregate (%)	LP-2	15.2	15.2	15.3	Average 15.3
Effective specific gravity of RAP aggregate	LP-2	---			
Voids filled with asphalt (%)	LP-3	73.9	73.7	73.3	Average 73.6
Dust proportion	LP-4	1.1			
Effective specific gravity of aggregate	LP-4	2.657			
Stabilometer value	CT 366	41	40	41	Average 41
Modified stabilometer value	CT 366	---	---	---	Average ---
Surface abrasion (%)	CT 360	---	---	---	Average ---
Tensile strength ratio (TSR) untreated <sup>2</sup>	CT 371	---			
Tensile strength ratio (TSR) treated <sup>2</sup>	CT 371	79			

Note:

<sup>1</sup>For mix design, prepare three briquettes separately at the proposed JMF and test for compliance. Report the average of three tests. Prepare new briquettes and test if the range of stability for the three briquettes is more than 12 points.

<sup>2</sup>Attach Figure 1 from CT 371


Notes/Remarks:




# CONTRACTOR HOT MIX ASPHALT DESIGN DATA (Continued)

CEM-3512 (NEW 3/2008)


**AIR VOIDS**

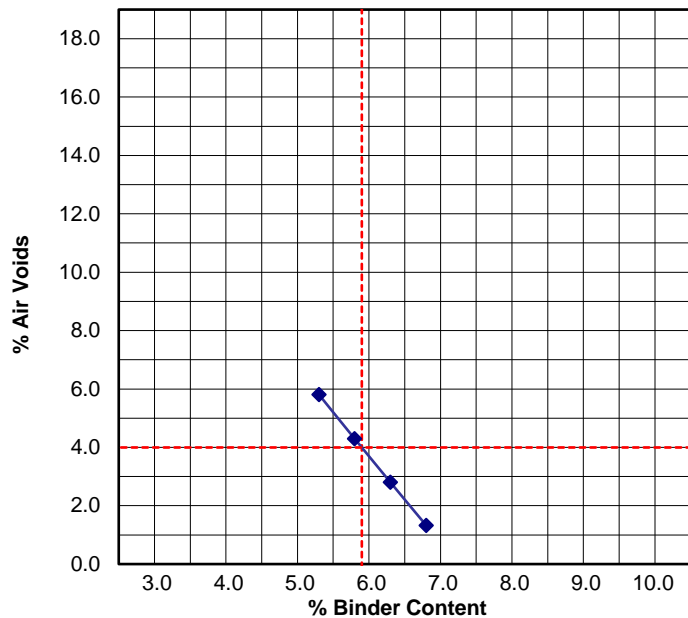


**VOIDS FILLED WITH ASPHALT**

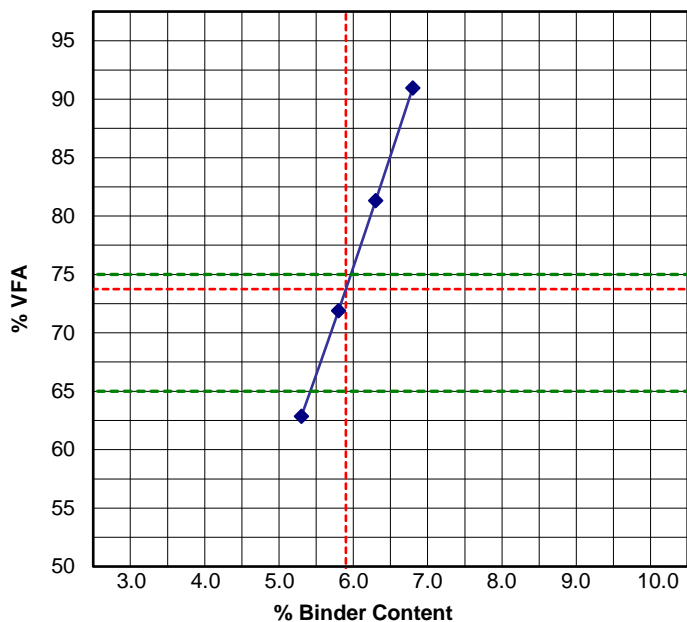

**STABILOMETER VALUE**

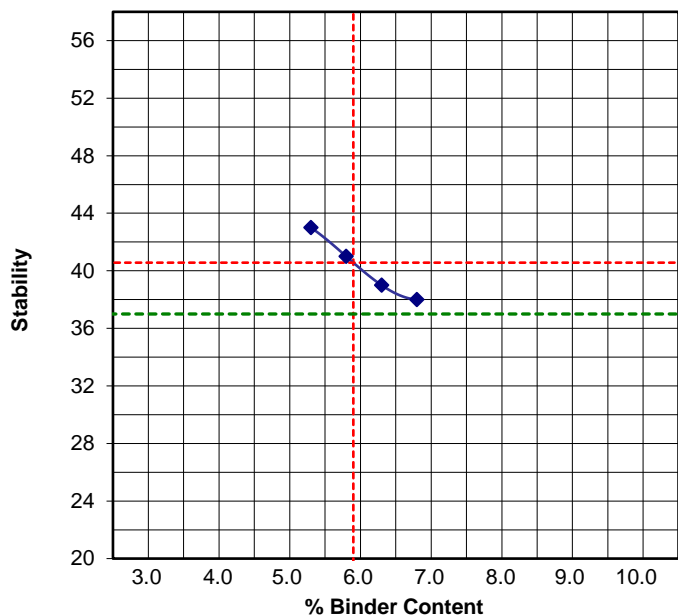

**VOIDS IN MINERAL AGGREGATE**

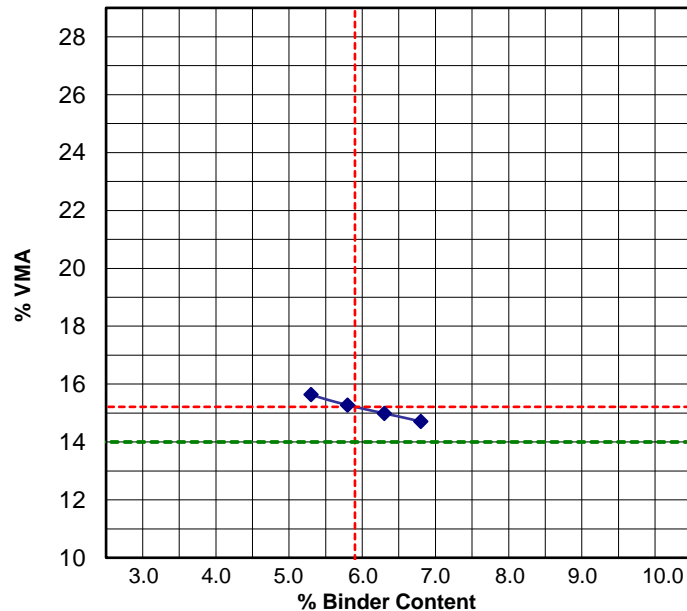

# CONTRACTOR HOT MIX ASPHALT DESIGN DATA (Continued)

CEM-3512 (NEW 3/2008)

